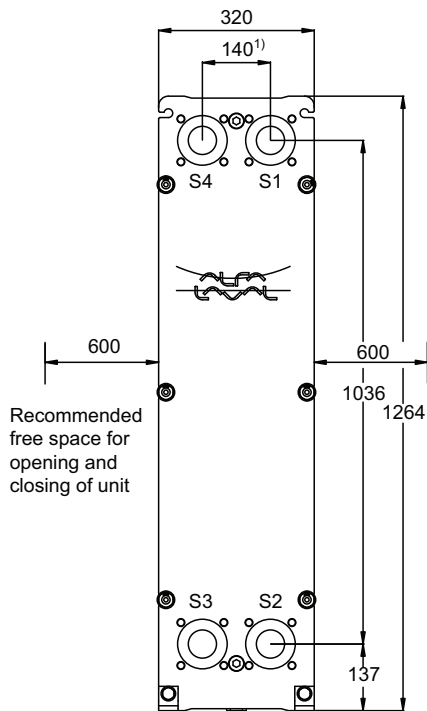


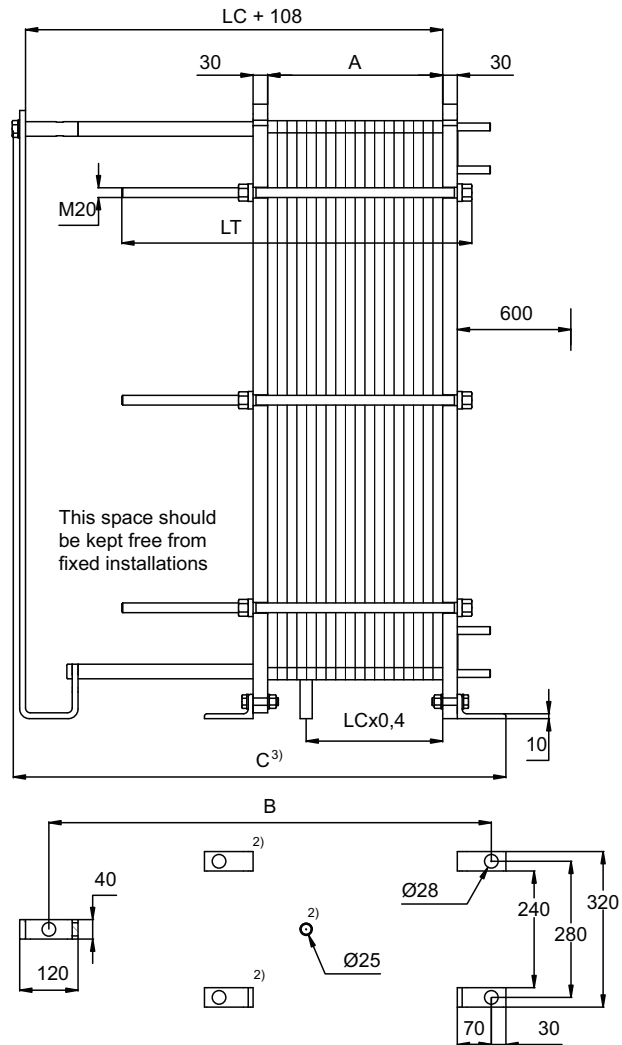


Plate Heat Exchanger type TL6-BFG

pvcALS™




- 1) If DN 2" ASME 150 add 14mm
If DN50 JIS 10/16K add 16mm
- 2) Extra feet and support added when LC > 750
- 3) The total length may differ depending on type of connection standard




Connection types

Pipe connection

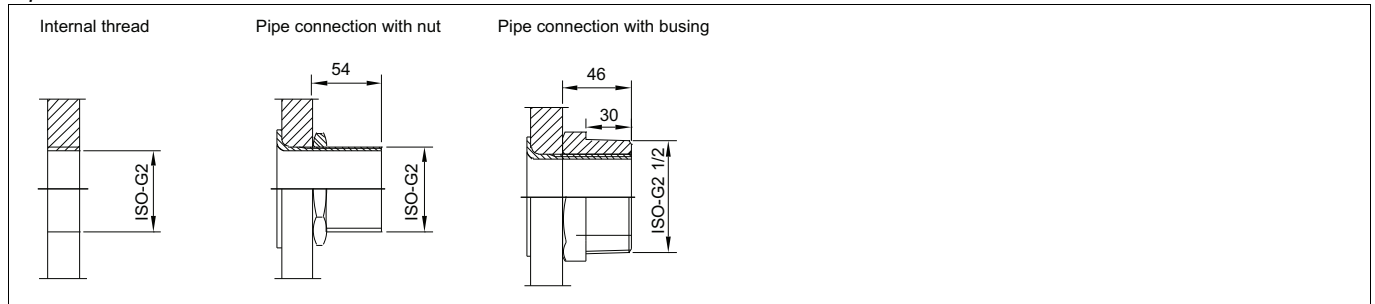

ASME 150 2" and DN50 JIS 16K/10K

NOTE! The flange is not centric to the port hole on the frame plate.

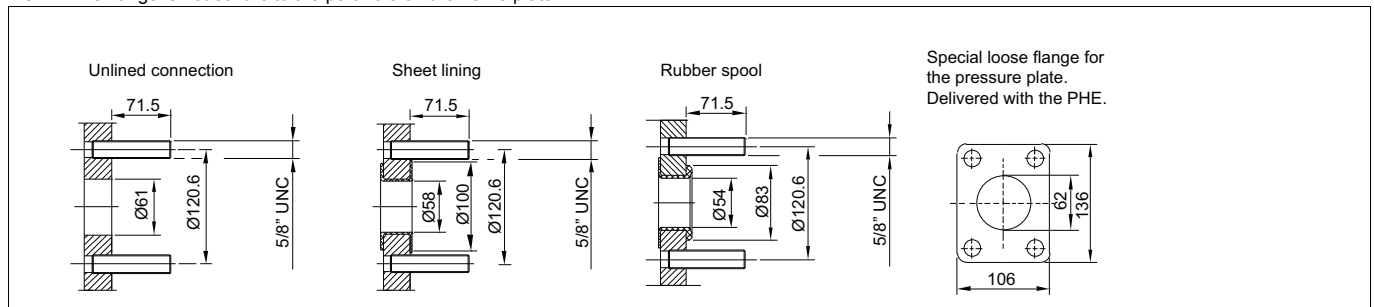

Date	No.	Edition	Dept
0903	32200-1704	4	PC CHE

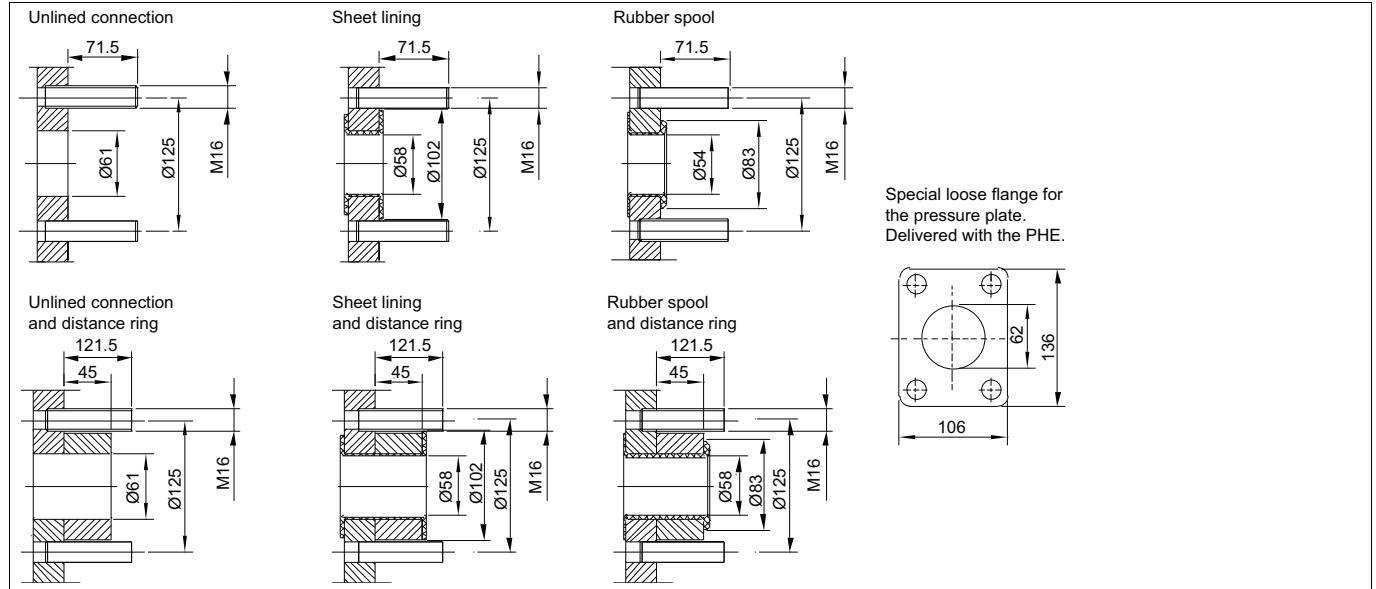


Plate Heat Exchanger type TL6-BFG


pvcALS™

DN50 DIN PN 16, GB PN16 and GOST PN16


A distance ring is necessary for connection hole S2 and S4



ASME 150 2 1/2"

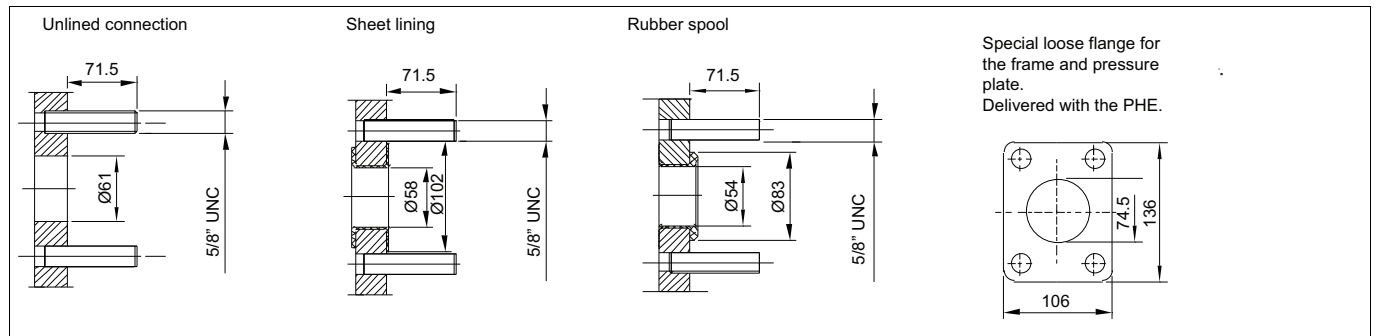

DN65 DIN PN 16, GB PN16, GOST PN16 and JIS 16K/10K

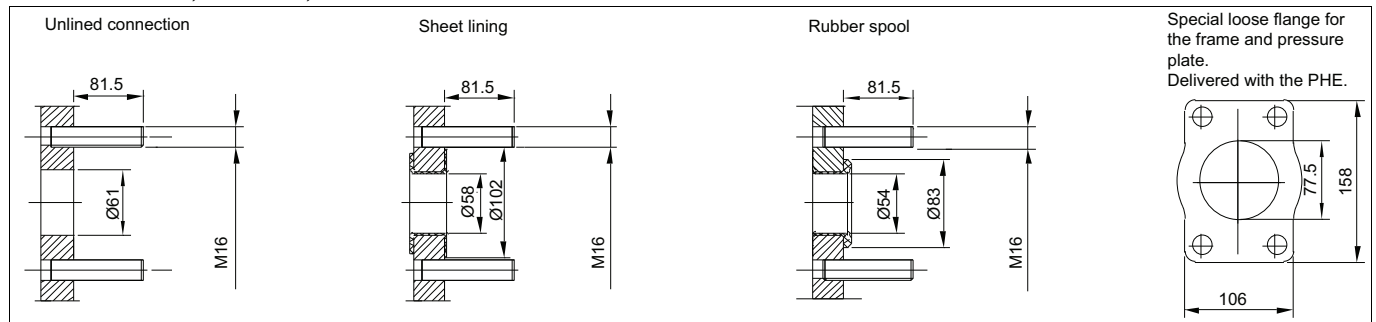


Date	No.	Edition	Dept
0903	32200-1704	4	PC CHE



Plate Heat Exchanger type TL6-BFG

pvcALS™

Connection locations

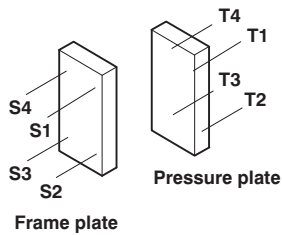

Location	Media	Conn. Type

Quotation no.		
Order no.		
Item no.		
Calculation no.		
Prepared	Checked	Approved